PRELIMINARY GUIDANCE

FOR ESTIMATING

MAXIMUM PROBABLE DISCHARGES

IN

PHASE I DAM SAFETY

INVESTIGATIONS

New England Division
Corps of Engineers

March 1978

MAXIMUM PROBABLE FLOOD INFLOWS
NED RESERVOIRS

	Project	Q (cfs)	D.A. (sq. mi.)	MPF cfs/sq. mi.
1.	Hall Meadow Brook	26,600	17.2	1,546
2.	East Branch	15,500	9.25	1,675
3.	Thomaston	158,000	97.2	1,625
4.	Northfield Brook	9,000	5.7	1,580
5.	Black Rock	35,000	20.4	1,715
6.	Hancock Brook	20,700	12.0	1,725
7.	Hop Brook	26,400	16.4	1,610
8.	Tully	47,000	50.0	940
9.	Barre Falls	61,000	55.0	1,109
10.	Conant Brook	11,900	7.8	1,525
11.	Knightville	160,000	162.0	987
12.	Littleville	98,000	52.3	1,870
13.	Colebrook River	165,000	118.0	1,400
14.	Mad River	30,000	18.2	1,650
15.	Sucker Brook	6,500	3.43	1,895
16.	Union Village	110,000	126.0	873
17.	North Hartland	199,000	220.0	904
18.	North Springfield	157,000	158.0	994
19.	Ball Mountain	190,000	172.0	1,105
20.	Townshend	228,000	106.0(278 total)	820
21.	Surry Mountain	63,000	100.0	630
22.	Otter Brook	45,000	47.0	957
23.	Birch Hill	88,500	175.0	505
24.	East Brimfield	73,900	67.5	1,095
25.	Westville	38,400	99.5(32 net)	1,200
26.	West Thompson	85,000	173.5(74 net)	1,150
27.	Hodges Village	35,600	31.1	1,145
28.	Buffumville	36,500	26.5	1,377
29.	Mansfield Hollow	125,000	159.0	786
30.	West Hill	26,000	28.0	928
31.	Franklin Falls	210,000	1000.0	210
32.	Blackwater	66,500	128.0	520
33.	Hopkinton	135,000	426.0	316
34.	Everett	68,000	64.0	1,062
35.	MacDowell	36,300	44.0	825

MAXIMUM PROBABLE FLOWS
BASED ON TWICE THE
STANDARD PROJECT FLOOD
(Flat and Coastal Areas)

	River	SPF (cfs)	D.A. (sq. mi.)	MPF (cfs/sq. mi.)
1.	Pawtuxet River	19,000	200	190
2.	Mill River (R.I.)	8,500	34	500
3.	Peters River (R.I.)	3,200	13	490
4.	Kettle Brook	8,000	30	530
5.	Sudbury River.	11,700	86	270
6.	Indian Brook (Hopk.)	1,000	5.9	340
7.	Charles River.	6,000	184	65
8.	Blackstone River.	43,000	416	200
9.	Quinebaug River	55,000	331	330

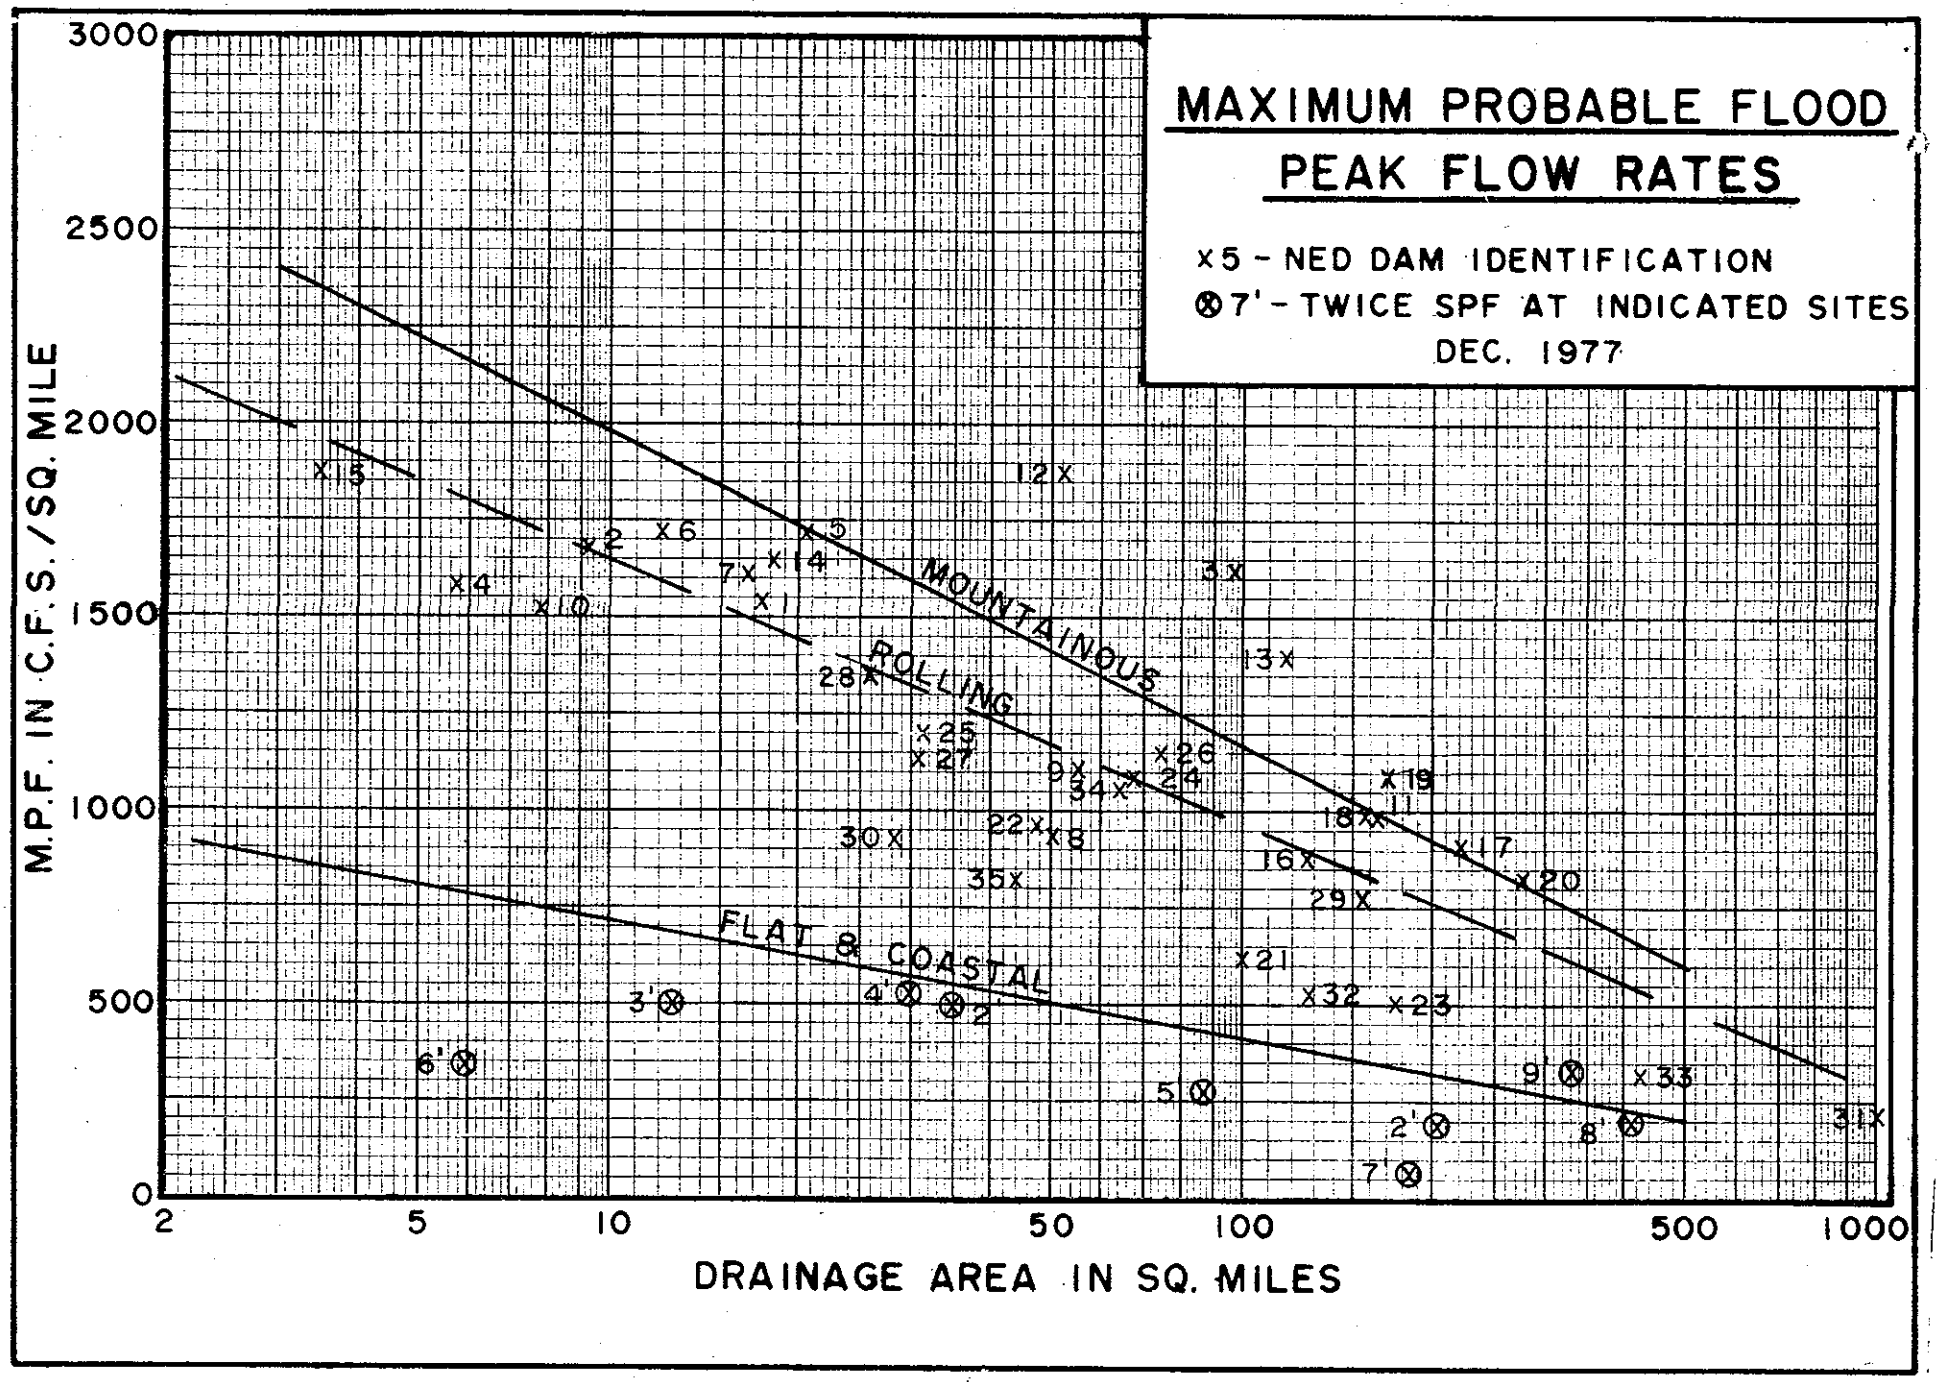
MAXIMUM PROBABLE FLOOD
PEAK FLOW RATES
x5 - NED DAM IDENTIFICATION
⊗7' - TWICE SPF AT INDICATED SITES
DEC. 1977
M.P.F. IN C.F.S./SQ. MILE
DRAINAGE AREA IN SQ. MILES
MOUNTAINOUS
ROLLING
FLAT & COASTAL
3000
2500
2000
1500
1000
500
0
2
5
10
50
100
500
1000

ESTIMATING EFFECT OF SURCHARGE STORAGE ON MAXIMUM PROBABLE DISCHARGES

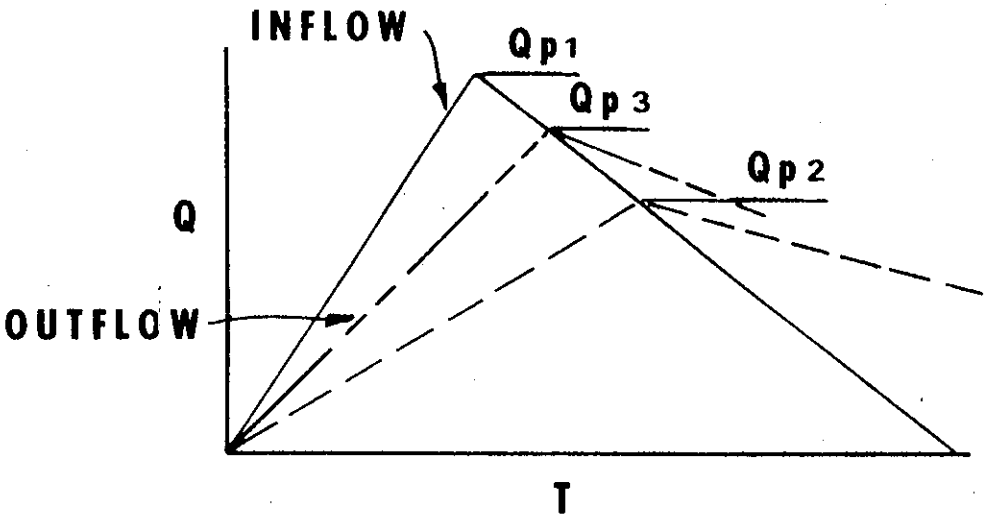

STEP 1: Determine Peak Inflow (Qp_1) from Guide Curves.

STEP 2: a. Determine Surcharge Height To Pass "Qp_1".

b. Determine Volume of Surcharge ($STOR_1$) In Inches of Runoff.

c. Maximum Probable Flood Runoff In New England equals Approx. 19", Therefore:

$$Qp_2 = Qp_1 \times \left(1 - \frac{STOR_1}{19}\right)$$

STEP 3: a. Determine Surcharge Height and "$STOR_2$" To Pass "Qp_2"

b. Average "$STOR_1$" and "$STOR_2$" and Determine Average Surcharge and Resulting Peak Outflow "Qp_3".