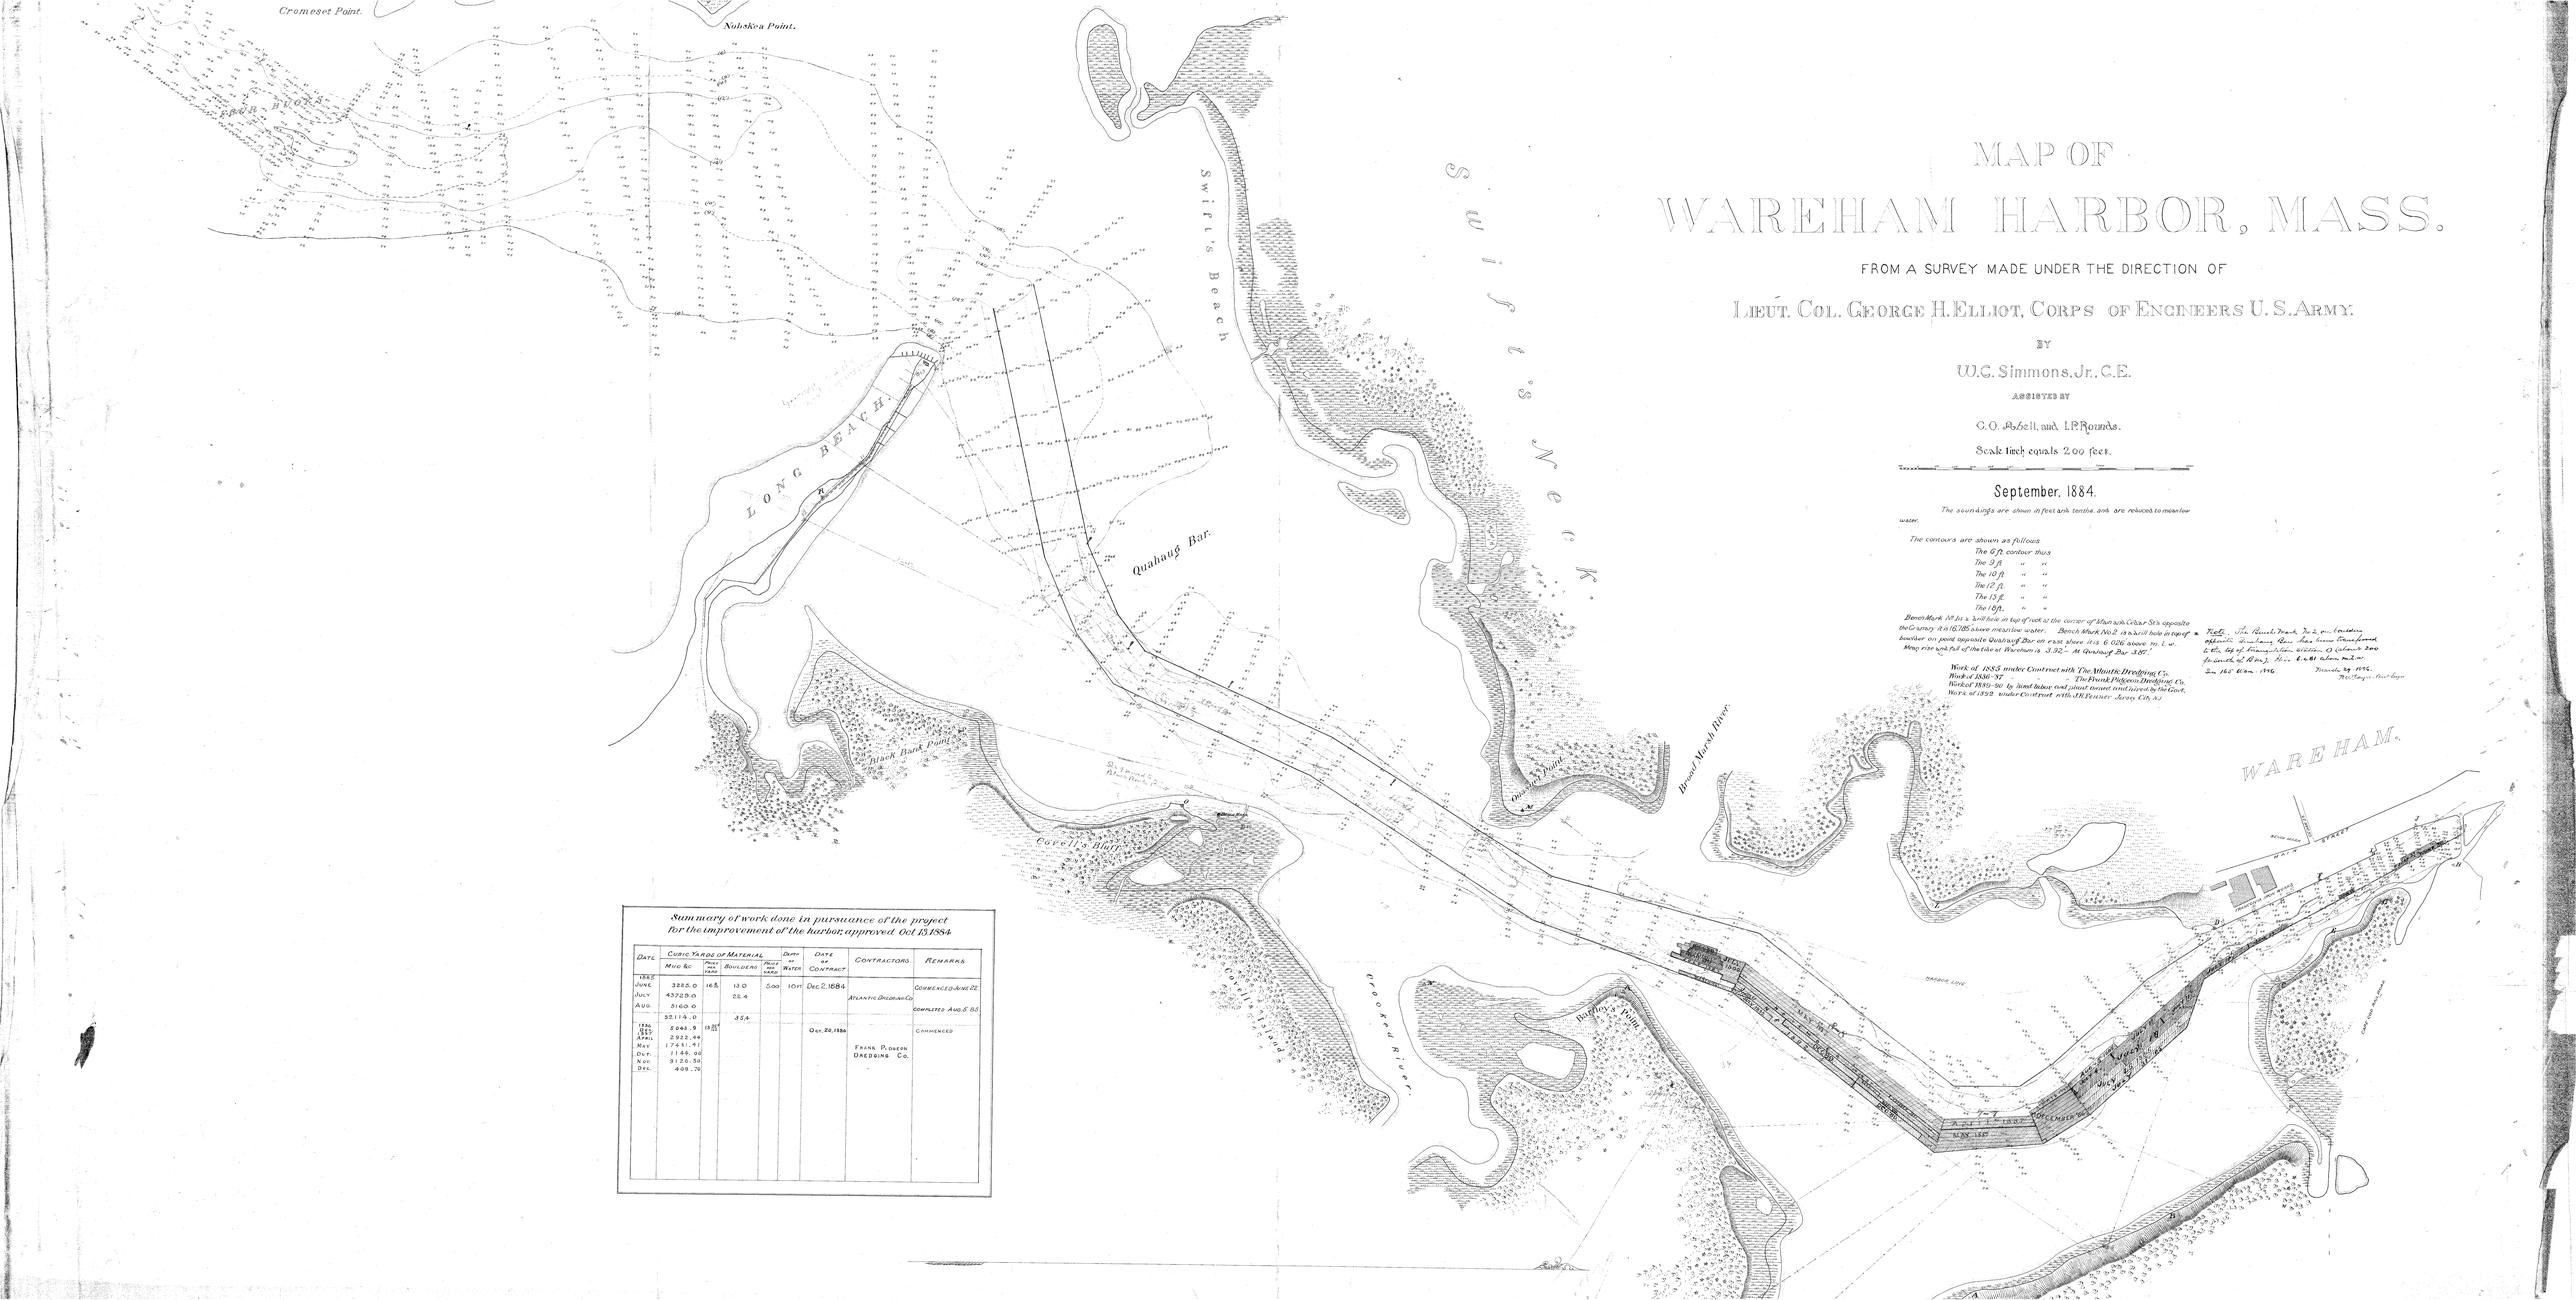
MAP OF
WAREHAM HARBOR, MASS.
FROM A SURVEY MADE UNDER THE DIRECTION OF
LIEUT. COL. GEORGE H. ELLIOT, CORPS OF ENGINEERS U.S. ARMY.
BY
W.C. Simmons, Jr., C.E.
ASSISTED BY
C.O. Bassell, and I.P. Rounds.
Scale 1 inch equals 200 feet.
September, 1884.
The soundings are shown in feet and tenths, and are reduced to mean low water.
The contours are shown as follows
The 6 ft. contour thus
The 8 ft. " "
The 10 ft. " "
The 12 ft. " "
The 15 ft. " "
The 18 ft. " "
Bench Mark 1A is a drill hole in top of rock at the corner of Main and Cedar Sts. opposite McGinty. It is 12.285 above mean low water. Bench Mark No. 2 is a drill hole in top of a boulder on point opposite Quahaug Bar on east shore. It is 6.026 above M.L.W.
Mean rise and fall of the tide at Wareham is 3.92. At Quahaug Bar 3.87.
Work of 1883 under Contract with The Atlantic Dredging Co.
Work of 1886-87 " " The Frank Pidgeon Dredging Co.
Work of 1891-96 by hired labor and plant owned and hired by the Govt.
Work of 1892 under Contract with M.H. Foster, Jersey City, N.J.
Note. The Bench Mark No. 2 on Quahaug Point is 0.741 higher than Bench Mark No. 1 at the Cor. of Main and Cedar Sts.
Wareham, Sep. 1884.
H.C. Ringe, Civil Engr.
Cromeset Point.
Nobskea Point.
Swift's Neck.
Swift's Beach
LONG BEACH
Quahaug Bar.
Black Bank Point
Covell's Bluff
Covell's Island
Cranberry Point
Broad Marsh River
Bagley's Point
WAREHAM.
HARBOR LINE
JUNE 1885
DECEMBER 1886
JUNE 1887
APRIL 1886
JULY 1887
Summary of work done in pursuance of the project for the improvement of the harbor approved Oct 15 1884
Date
Cubic Yards of Material
Mud &c
Sand and Gravel
Boulders
Depth at Water
Date of Contract
Contractors
Remarks
1883
June
July
Aug.
3225.0
43725.0
5160.0
16.5
13.0
22.4
5.00
10 ft
Dec. 2, 1884
Atlantic Dredging Co.
Commenced June 22.
Completed Aug. 8. 83
52114.0
35.4
1886
1887
April
May
Oct.
Nov.
Dec.
5043.9
2922.44
17451.91
1146.00
3120.50
409.70
13.34
Oct. 20, 1886
Frank Pidgeon Dredging Co.
Commenced